

REV.	DESCRIPTION	DATE
B	N13'08012	Aug 06,2013
C	N13'11037	Nov 25,2013
D	N14'10003	OCT 09,2014
E	N15'04005	Mar 25,2015

MATERIALS:

- HOUSING: LCP (UL94V-0) BLACK.
- TERMINAL: BRASS ,T=0.20mm
PLATING: GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAILS.
NICKEL UNDERPLATING OVERALL.
- SHELL: STAINLESS STEEL,
PLATING: NICKEL PLATED OVERALL.

SPECIFICATION

- CURRENT RATING : 0.5 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- CONTACT RESISTANCE : 30mΩ MAX.
- INSULATION RESISTANCE :
100 MΩ MIN. AT 500V DC.
- OPERATING TEMPERATURE : -25°C TO +85°C.







PART NUMBER INFORMATION

365FA19-XN301D-X

SERIES CODE 365FA19
DIP
FEMALE
A TYPE
NUMBER OF POSITIONS

XN301D-X
R:RoHS
H:HALOGEN FREE
FOLLOW NUMBER
DIP+SPRING
NICKEL PLATED
PLATING SEE TABLE

DESCRIPTION OF PLATING ON TERMINALS			
NO.	EXPLAIN	NO.	EXPLAIN
0	GOLD FLASH	3	GOLD 15u"
6	GOLD 30u"		
TOLERANCE .0=±0.25 .00=±0.15 .000=±0.05 ANG.=±3°		DRAWER CHECK APP'D PRODUCT SPEC.	
UNITS : mm		DRAW NO.	
SCALE NONE	SIZE A6	SHEET 1 OF 1	REV. E
R365FA19-XN301D-X			

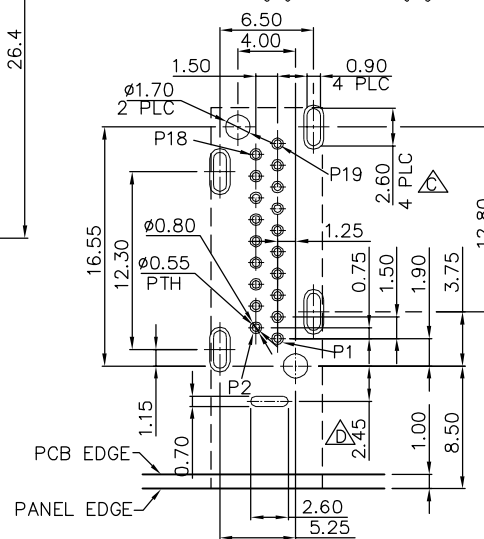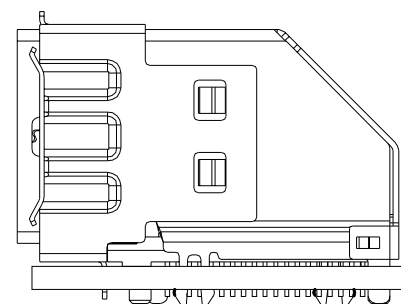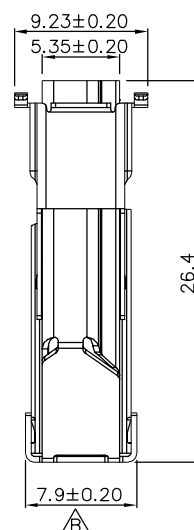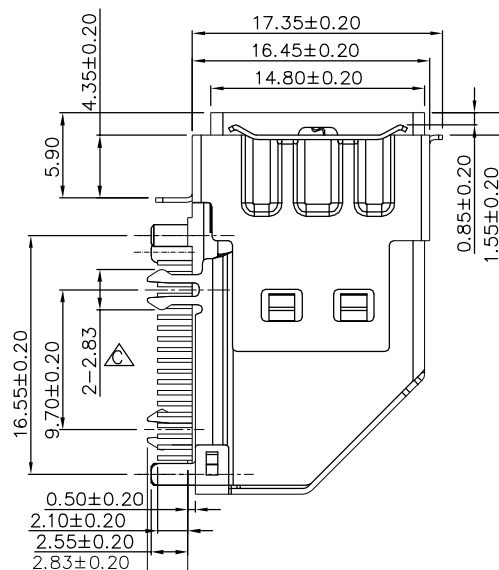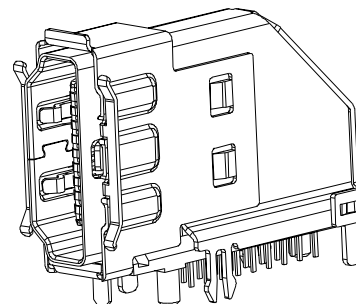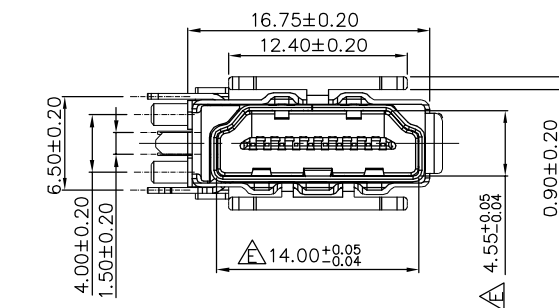

RECOMMEND PCB LAYOUT

TOLERANCE: ±0.05

PCB THICKNESS: 1.6±0.05

TOP VIEW