
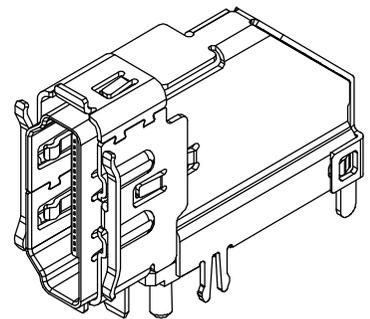


REV.	DESCRIPTION	DATE
A	N15'10021	Oct 30, 2015

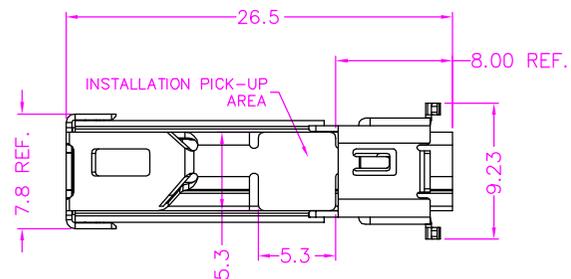







MATERIALS

- HOUSING : L.C.P (UL 94V-0), BLACK.
- TERMINAL : BRASS, (t=0.20mm)
GOLD PLATED ON CONTACT AREA,
TIN PLATED ON SOLDER TAIL,
UNDER NICKEL PLATED OVER ALL.
- SHELL : STAINLESS STEEL, (t=0.40mm), NICKEL PLATING.
- COVER : BRASS, (t=0.40mm), NICKEL PLATING.


SPECIFICATION

- CURRENT RATING : 0.5 A MAX.
- DIELECTRIC WITHSTANDING VOLTAGE :
500V AC R.M.S. FOR ONE MINUTE.
- CONTACT RESISTANCE : 30mΩ MAX.
- INSULATION RESISTANCE :
100 MΩ MIN. AT 500V DC.
- OPERATING TEMPERATURE : -25°C TO +85°C.

PART NUMBER INFORMATION

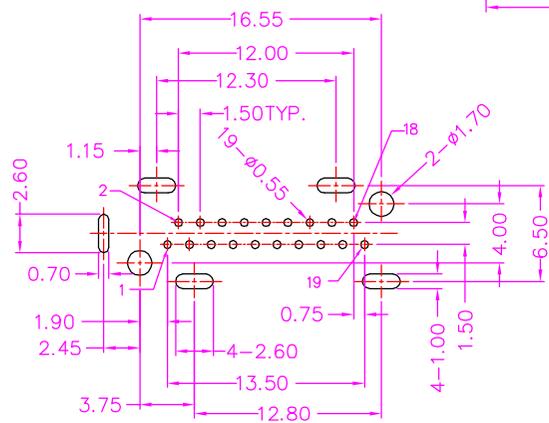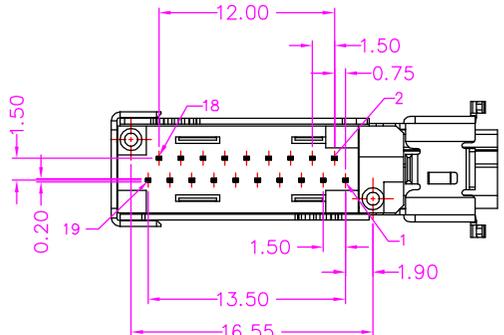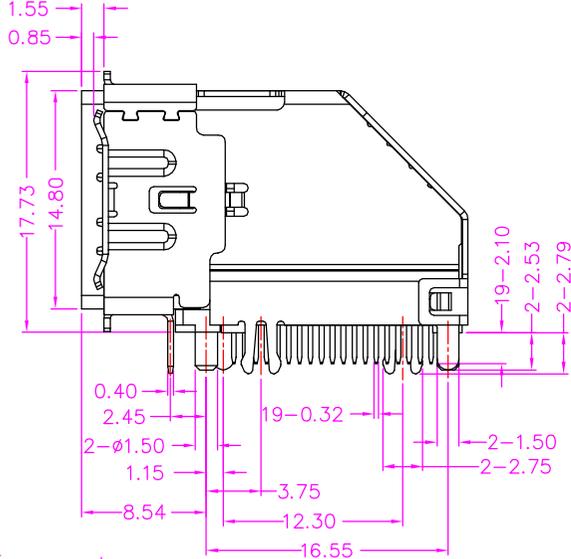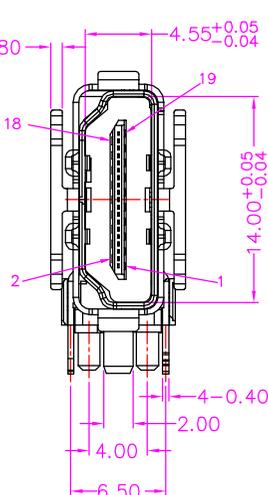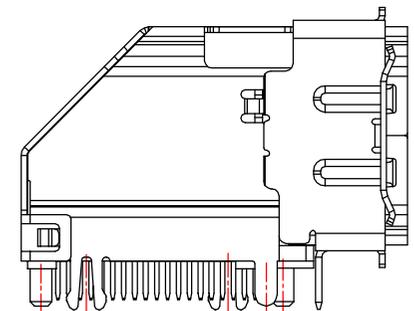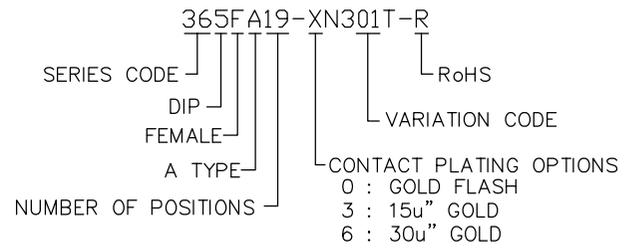

RECOMMEND P.C.B LAYOUT
TOP VIEW

TOLERANCE .0=±0.30 .00=±0.20 .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>JMG</i>			Astron WWW.ASTRON.COM.TW
UNITS : mm		CHECK <i>ERF</i>			
SCALE NONE		APP'D <i>ERF</i>		NAME HDMI CONNECTOR A TYPE, UPRIGHT TYPE W/SPRING	
SIZE A4		PRODUCT SPEC. —		DRAW NO. 365FA19-XN301T-R	
SHEET 1 OF 1		REV. A		08031	