

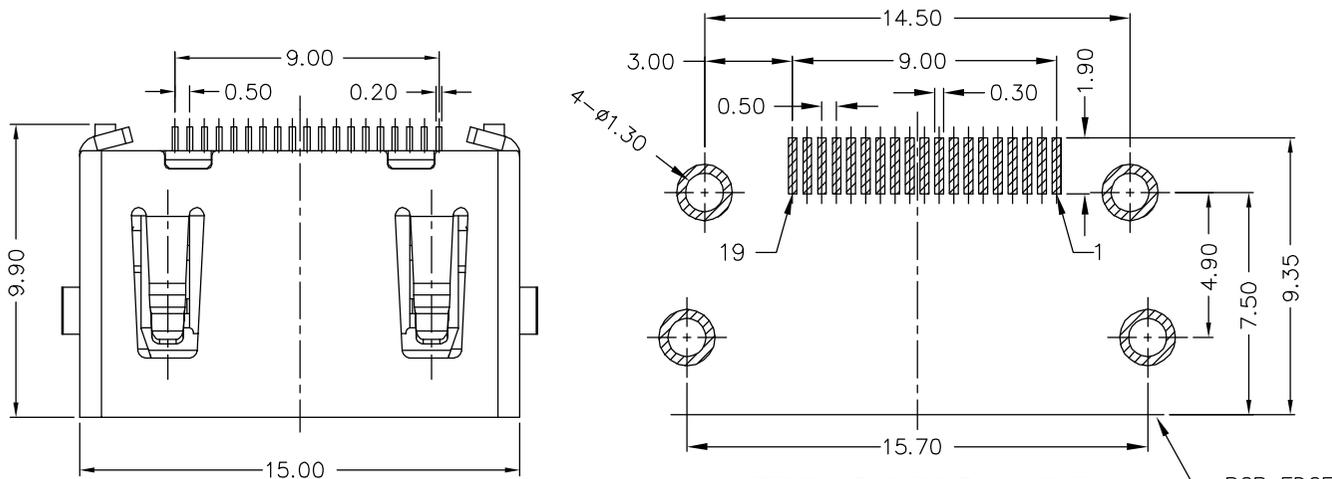
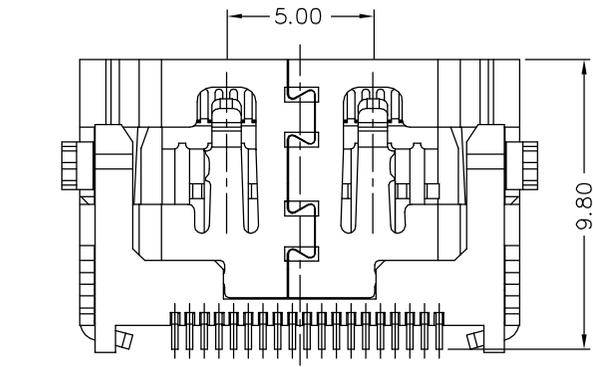


REV.	DESCRIPTION	DATE
A	N15'07023	May. 27, 2015

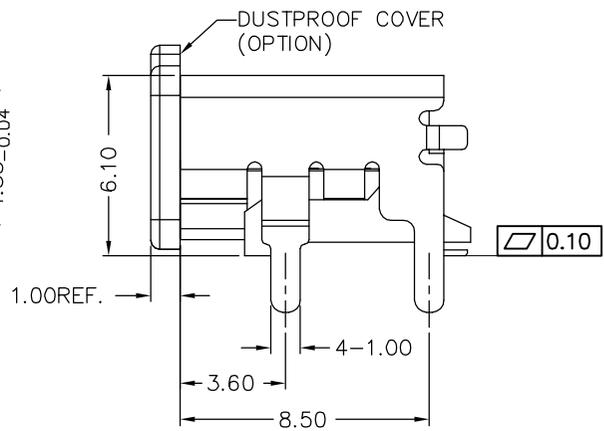

RECOMMEND P.C.B. LAYOUT
TOP VIEW

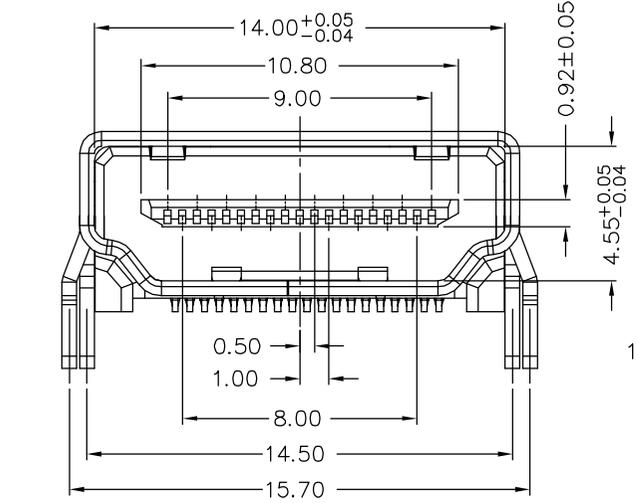


MATERIALS

1. HOUSING : L.C.P (UL 94V-0), BLACK
2. TERMINAL : BRASS, GOLD FLASH ON CONTACT AREA, TIN PLATED ON SOLDER TAIL, UNDER NICKEL PLATED OVER ALL.
3. SHELL : STAINLESS STEEL, NICKEL PLATING.

SPECIFICATION




1. CURRENT RATING : 0.5 A MIN.
2. VOLTAGE RATING : 40V AC
3. DIELECTRIC WITHSTANDING VOLTAGE : 500V AC R.M.S. FOR ONE MINUTE.
4. INSULATION RESISTANCE : 100M OHMS MIN. AT 500V DC.
5. CONTACT RESISTANCE : 30m OHMS MAX.
6. OPERATING TEMPERATURE : -25°C TO +85°C.
7. DURABILITY : 10000 CYCLES.
8. MATING FORCE : 4.5kgf MAX.
9. UNMATING FORCE : 1.0~4.0kgf

PART NUMBER INFORMATION

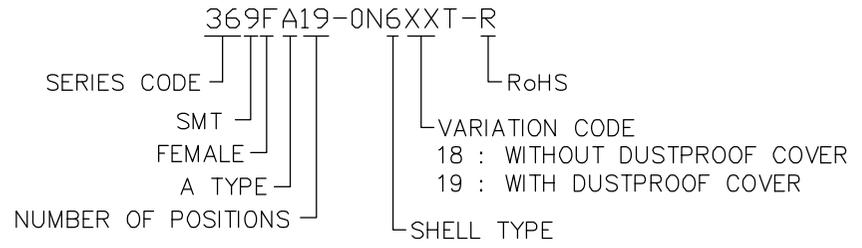

TOLERANCE .0=±0.38 .00=±0.25 .000=±.XXX .0000=±. ANG.=±3°		DRAWER <i>JMG</i>		NAME Astron WWW.ASTRON.COM.TW
UNITS : mm		CHECK <i>JANPEE</i>		
SCALE NONE		APP'D <i>ERP</i>		DRAW NO. 369FA19-0N6XXT-R
SIZE A4		PRODUCT SPEC. ---		
SHEET 1 OF 3		REV. A		T0105

REV.	DESCRIPTION	DATE
A	N15'07023	Jul. 27, 2015

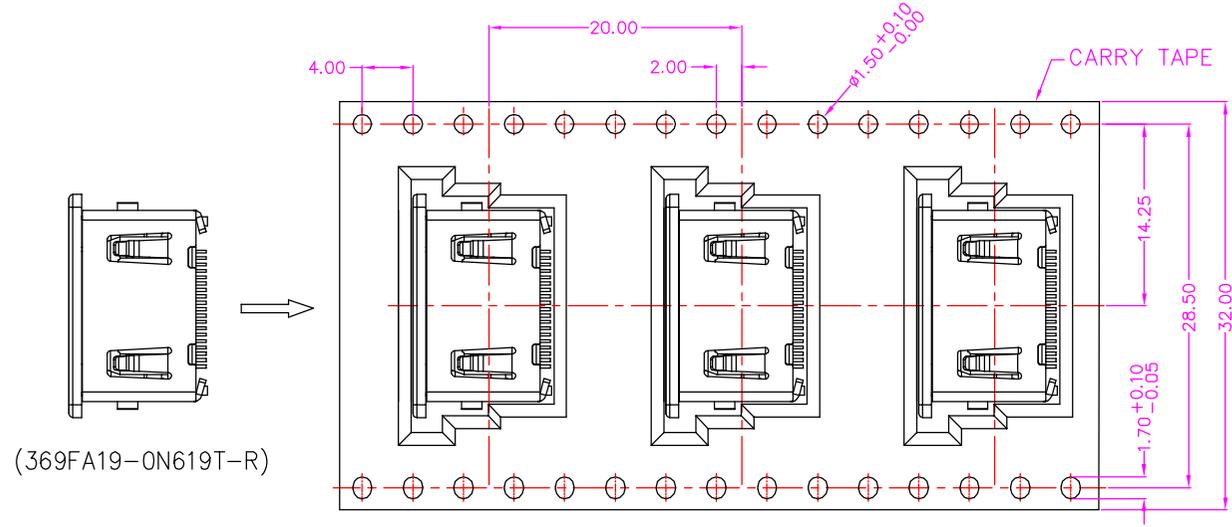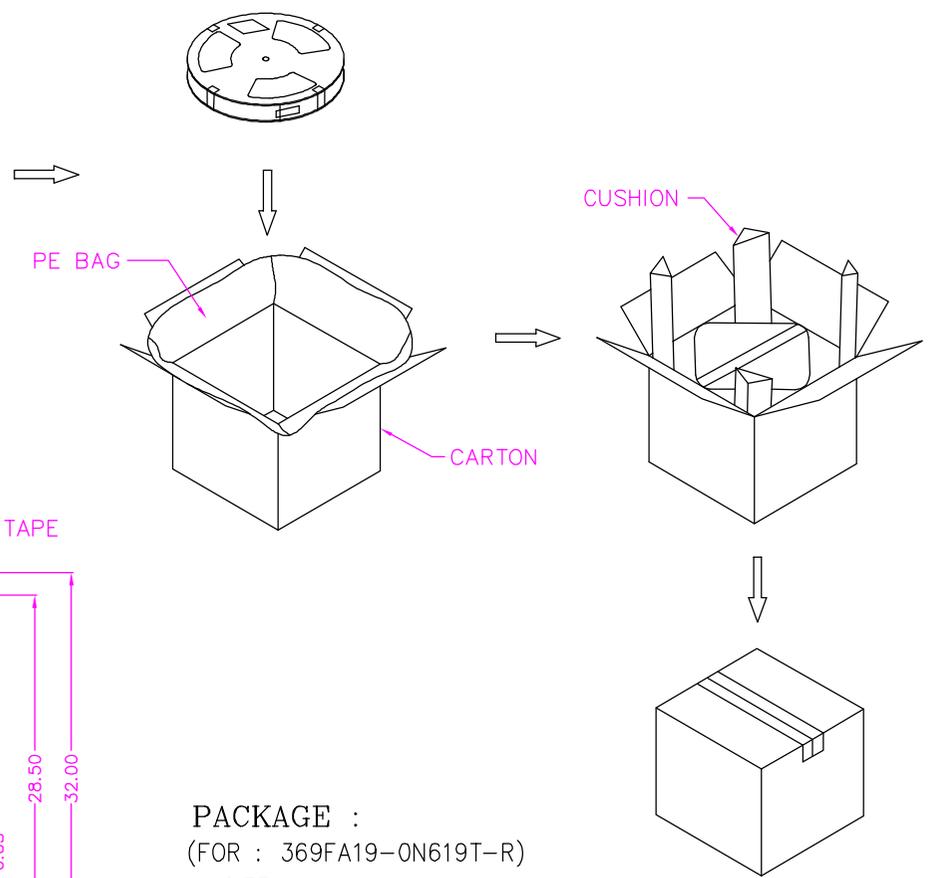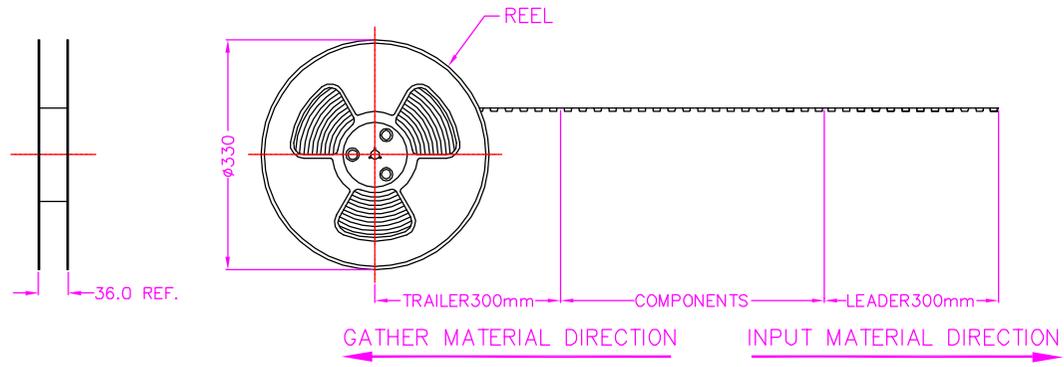

PACKAGE :
 (FOR : 369FA19-0N619T-R)

- SIZE :
 REEL : DIA.=330mm
 CARTON : 350x350x380mm (LxWxH)
- QUANTITY :
 320 PCS/REEL
 10 REEL/CARTON = 3200PCS

TOLERANCE .0= \pm . .00= \pm . .000= \pm . .0000= \pm . ANG.= $\pm 3^\circ$		DRAWER <i>JMG</i>	 WWW.ASTRON.COM.TW
		CHECK <i>JANFB</i>	
UNITS : mm		APP'D <i>ERP</i>	DRAW NO. 369FA19-0N6XXT-R
SCALE NONE	SIZE A4	SHEET 3 OF 3	REV. A
		T0105	